

### **PanTilt Video Door Station**

Model: MY-CA


### INSTALLATION & OPERATION MANUAL

### SYSTEM OUTLINE & FEATURES

The MY-CA is a compact, surface mount pan and tilt video door station. It can be used with any Aiphone MY video system (MY-1CD, MY-2CD, MY/IE, MY/TD-H, MY/LEF).

#### For 1 entry;

MY-1CD MY-CU



1A1, 1A2

A1, A2

MY-2CD

1A1, 1A2 2A1, 2A2



MYW-P3CB

For 2 or max. 3 entries:

1A1, 1A2 2A1, 2A2 3A1, 3A2

1A1, 1A2 2A1, 2A2 3A1, 3A2

MYW-P3L

#### PACKAGE CONTENTS

- PanTilt video door station (MY-CA)
- Tamper-proof screwdriver



- Packet of screws
- Installation & Operation Manual

### **■ FEATURES**

Terminals

Connecting 1A1, 1A2


- · Audio, video, and PanTilt control on 2 wires
- · Pan and tilting of MY-CA camera
- 100m, 330' to monitor on 1.0mmø, 18AWG wire
- Extended distance to 300 m, 980' with MYW-BA adaptor (using 1.2mmø, 16AWG PE jacketed wire)
- Replace an existing doorbell and use the same wire

### **■ LAYOUT EXAMPLE**



★ Refer to the Installation & Operation manual packed with main monitor or adaptor.

## NAMES AND FUNCTIONS



The MY-CA, when measured at 50 cm, 20" from the camera. views an area of 51 cm, 20" vertically by 72 cm, 29" horizontally. On any and every inside monitor, operate Pan/tilt control pad to maximize viewing area, and Backlight button to view dimly lit or strongly backlit areas.





Image on edges of monitor is slightly distorted.

# **INSTALLATION & WIRING**

Wiring Use 2-conductor (parallel) cable. Coaxial cable or 2 separate wires should not be used. Parallel cable

YES

- ★ When existing chime wires are used, it is possible that the wires may contain AC voltage current. Locate and remove the bell transformer before actually connecting MY-CA.
- ★ Extra pair(s) in the installed cable can affect image quality, and must be terminated with a 120 ohm resistor at each end of wires at both MY-CA location and inside monitor(s).




Installation



MY-CA employs a CCD camera, and its performance can be affected by bright direct light, such as strong sunlight, gate light or street or porch light which is directed into the camera lens. Use backlight button to compensate for silhouetted images.

Do not mount the MY-CA with a horizontal surface directly below it (like a counter top), as feedback may occur (microphone is located on the bottom of unit.)

## MOUNTING



Do not apply any sealant around MY-CA, as openings are provided for ventilation.


### Plug off power supply prior to wiring on any unit.

MY-CA surface-mounts on wall with 83.5mm, 3-5/16" guide, or on single-gang box.

- 1. Remove screw cover, pulling from bottom notch.
- Loosen a tamper-proof screw with supplied driver.
- 3. Mount back frame at 2 points.
- Securely connect non-polarized A1, A2 terminals with 2 wires with sufficient insulation.
- Remount MY-CA on back frame.

## WIRING

### Wiring distance: MY-CA to Video-monitor MY-1CD ,etc.

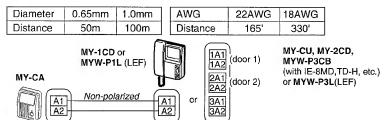

# **OPERATIONS**

The red LED is lit to locate call button, day or night. A single push of Call button activates inside video monitor, as well as a 4 or 2-tone chime (or other). When inside station replies, talk handsfree.

### ★ Poor lighting conditions:

The MY-CA infrared illumination will light the image of the caller when positioned within 50cm, 20" in front of the camera, and will see in near darkness (1 Lux of light).

### TECHNICAL PRECAUTIONS

MY-CA has a camera angle presetting feature, programmable on inside video monitor. Refer to each Manual of MY-1CD, MY-2CD, etc.

Installation location: The MY-CA is weather resistant, but for best results it should be protected from direct weather conditions. An eave or overhead cover is

recommended to protect it from direct rainfall.

Temperature: The MY-CA is rated to operate at temperatures between -10°C ~ 60°C (14° and 140°F). When the outside temperature lowers rapidly, the

camera lens may fog up slightly, causing a blurry picture at the inside monitor. The ventilation openings will allow the moisture to evaporate, and

the picture will return to normal.

Cleaning: Clean the unit with a soft cloth and neutral household cleanser. Do not use an abrasive cleaner or cloth,


# SPECIFICATIONS

Power source Camera unit Scanning lines Image viewing area

Camera is powered from monitor unit CCD camera 525 lines at 50 cm, 20" from camera Vertical 90cm, 3'. Horizontal 180cm, 6' (140cm, 4'7" in still position) when panned and tilted fully

Minimum illumination Dimensions & weight

1 Lux at 50cm, 20" from carnera 132mm high x 100mm wide x 47.5mm deep. 5-1/4" H x 4" W x 2" D. Approx. 350g (0.77 lbs.) Pan/tilt viewing area shown by dotted line



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.
 Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 Increase the separation between the equipment and receiver.
 Consult the dealer or an experienced radio/TV technician for help.

#### WARRANTY

Aiphone warrants its products to be free from defects of material and workmanship under normal use and service for a period of 2 years Alphone warrants is products to be need from defects of material and workmarship under hormal use and service for a period of 2 years after delivery to the ultimate user and will repair free of charge or replace at no charge, should it become defective upon which examination shall disclose to be defective and under warranty. Alphone reserves unto itself the sole right to make the final decision whether there is a detect in materials and/or workmanship; and whether or not the product is within the warranty.

This warranty shall not apply to any Alphone product which has been subject to misuse, neglect, accident, or to use in violation of instructions furnished, nor extended to units which have been repaired or altered outside of the factory. This warranty does not cover betteries are demonstrated by betteries used in acceptation with the product.

batteries or damage caused by batteries used in connection with the product.

This warranty covers bench repairs only, and any repairs must be made at the shop or place designated in writing by Aiphone. Aiphone will not be responsible for any costs incurred involving on site service calls.